


CODE 4011



Gomito a 45° - 45° Elbow - Coude à 45° - Codo 45° - Winkel 45° - Колено 45°



CODE	DIM [mm]	A [mm]	B [mm]	C [mm]	E [mm]	F [mm]	PACK		€/pz
							BAG [UMV]	OT1	
4011260000001	26x26	88	46	43	26x3,0	26x3,0	1	-	24,81
4011320000001	32x32	90	46	45	32x3,0	32x3,0	1	-	28,61
4011400000001	40x40	122	63	60	40x3,5	40x3,5	1	-	99,81

GENERAL TECHNICAL SPECIFICATIONS






DeltaPress WATER

Unidelta manufactures a wide range of MultiProfile brass press fittings (DeltaPress Water), suitable for heating systems at both low temperatures (radiant panels) and high temperatures (radiators) as well as for cooling systems, antifreeze and snowmelt systems. These fittings were designed and manufactured to be pressed with the most common clamping profiles.

Fig. 1 - Profiles of the jaws



	Profile TH	Profile H	Profile U	
Jaws Profile	Ø16 [mm]	Ø18 [mm]	Ø20 [mm]	Ø26 [mm]
TH	✓	✓	✓	✓
H	✓	✓	✓	✓
U	✓	✓	✓	-

Jaws Profile	Ø16 [mm]	Ø18 [mm]	Ø20 [mm]	Ø26 [mm]	Ø32 [mm]	Ø40 [mm]	Ø50 [mm]	Ø63 [mm]
TH	✓	✓	✓	✓	✓	✓	✓	✓
H	✓	✓	✓	✓	✓	✓	-	-
U	✓	✓	✓	-	✓	✓	✓	✓

The range of Delta Press Water press fittings is compatible with:

- Pipes PE-RT/Al/PE-RT: **FlexAll**;
- Pipes PE-X: **UniTerm**, **TriTerm** Ø16x2,0 e Ø20x2,0;
- Pipes PE-RT: **UniPert** e **MultiPert Plus** Ø16x2,0 e Ø20x2,0.

Figure 2 shows the structure of a DeltaPress Water.

① The body of the fitting is made of a brass with excellent corrosion resistance. The rubber-holder profile has a saw-tooth geometry ensuring a greater traction hold, and is equipped with chamfers to facilitate the connection with the pipe, thus avoiding soliciting the components.

② The particular feature of the bushing ring nut in nylon is that it has inspection holes that make it possible to verify the correct insertion of the pipe up to the stop point of the barbs that do not allow contact between the metal part of the pipe and the fitting, thereby preventing the onset of galvanic corrosion.

③ The bushing is made of solubilised stainless steel for greater ductility in pressing.

④ Two O-rings, which guarantee a greater water seal, made of peroxide EPDM to be used for transporting potable water.

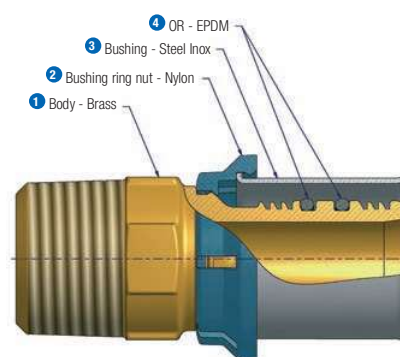


Fig. 2 - Structure of a DeltaPress Water