


CODE 3005



Gomito a 45° - Elbow 45° - Coude à 45° - Codo a 45° - Winkel 45° - Колено 45°
PE100 - S5 Gas - PN 16 20°C

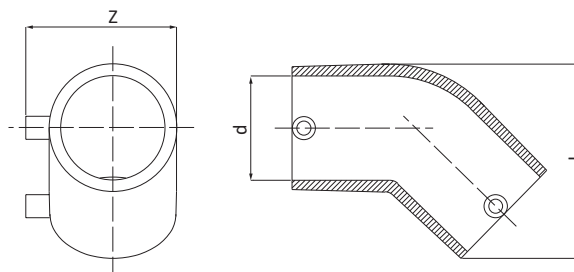

PE100 - SDR11 - S5

ACQUA: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; In Italia MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 e successive modifiche)

Per il tempo di saldatura da utilizzare con tubo SDR26 contattare direttamente Unidelta.

PE100 - SDR11 - S5

WATER: PFA (PN)=16 bar 20°C

GAS: MOP=10 bar; in Italy MOP=5 bar (D.M. 24/11/84, D.M. 16/4/2008 and further modification)

Contact Unidelta directly for the welding time to be used with SDR26 pipe.

CODE	DIM dxd [mm]	L [mm]	Z [mm]	W-SDR	PACK [UMV]					€/pz
					RIF. 10	RIF. 11	RIF. 12	RIF. 2	Sfusi Loose	
3005033000001	32x32	70	62	≤ 11	-	20	-	-	-	25,51
3005041000001	40x40	82	71	≤ 17	-	16	-	-	-	26,62
3005051000001	50x50	96	82	≤ 17	-	12	-	-	-	37,45
3005064000001	63x63	113	96	≤ 17	-	-	-	12	-	44,61
3005076000001	75x75	131	109	≤ 17	-	-	-	10	-	67,70
3005091000001	90x90	154	126	≤ 17	18	-	-	-	-	72,29
3005111000001	110x110	184	148	≤ 17	12	-	-	-	-	104,36
3005125000001	125x125	223	175	≤ 17	-	-	-	-	1	138,49
3005140000001	140x140*	235	181	≤ 17	-	-	-	-	1	180,59
3005160000001	160x160	274	216	≤ 17	-	-	-	-	1	185,34
3005180000001	180x180	300	238	≤ 17	-	-	-	-	1	298,89
3005200000001	200x200	334	260	≤ 17	-	-	-	-	1	653,86
3005225000001	225x225	362	282	≤ 17	-	-	-	-	1	692,94
3005250000001	250x250	396	312	≤ 17	-	-	-	-	1	915,05

* Disponibile solo a spira scoperta - * Available only with uncovered coil - * Disponible seulement avec spirale découverte

* Disponible sólo con resistencia no cubierta - * Nur mit entdeckten Windung verfügbar - * Доступно только с открытой спиралью